



Figure 4J-3(VA). Sequence for a Pedestrian Hybrid Beacon

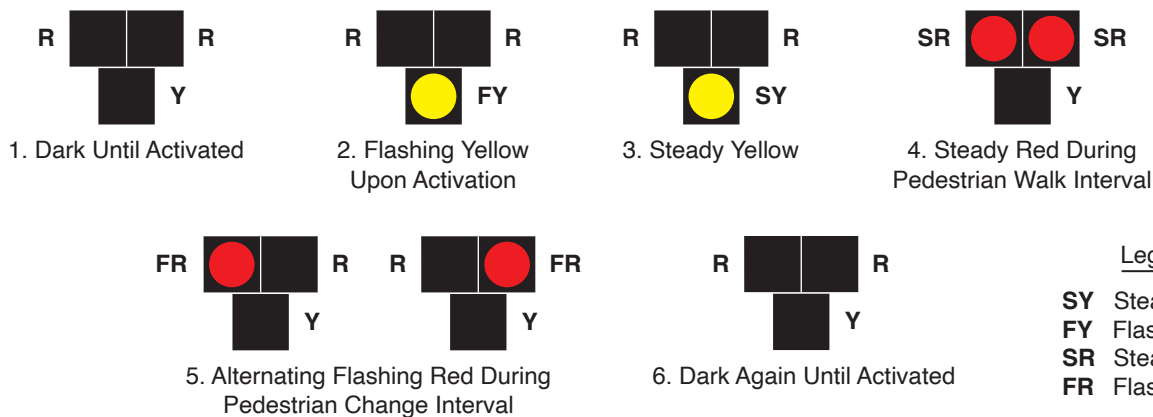

 Note: An optional steady red clearance interval may be added after Interval 3, ~~and a 2 second -and-an-optional-short~~ buffer interval (alternating flashing red while the pedestrian signal heads are displaying a steady UPRAISED HAND) ~~may shall~~ be added after Interval 5.